



TECHNICAL DATA


SAFESTEP ERIKSBERG – CONTRAST MARKINGS

Product description.

Safestep ERIKSBERG, contrast markings with aluminium are exceptionally durable in many different environments and weather. A suitable choice for Commercial and Residential use for high-traffic areas.

Product structure.

Schematic diagram:

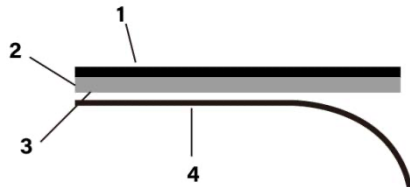

Name:

1. Quartz sand
2. Aluminium
3. PSA
4. Release paper

Product features.

NO	Test	Data	Unit	Remark
1	Quartz sand	150 Grit		
2	Thickness	0.7	mm	
3	Initial Adhesion	2.6N/cm		
4	180° Adhesion to steel	15.8N/25mm		
5	Holding Power	≥24h	h	
6	Rupture Strength	10%		
7	Common Temperature	-40°C-80°C		

Storage.

Shelf life: Two years, if stored in an environment with a temperature of 15–25 °C and a humidity of 50±15%.

1. Storage temperature above 25 °C may affect the adhesive force during use. High exposure to the sun may cause the release material to transfer and decrease the adhesive force.
2. Storage temperature below 10 °C may cause the initial viscosity to decrease.